


NOTES:

- 1. TREES BURIED TOO DEEP, OR WITHOUT EXPOSING ROOT FLARE WILL BE REJECTED & SHALL BE REMOVED & REPLANTED AT PROPER DEPTH.
- 2. ALL 'ADVENTITIOUS ROOTS' AND 'SUCKERS' SHALL BE PRUNED AWAY PRIOR TO PLANTING.
- 3. DEVIATIONS FROM THIS DETAIL SHALL ONLY BE ALLOWED WITH PERMISSION FROM THE VILLAGE ARBORIST OR TREE ADVISORY BOARD.
- 4. TREES NOT PLANTED IN CONFORMITY WITH THIS DETAIL WILL BE REJECTED BY THE VILLAGE ARBORIST OR TREE ADVISORY BOARD. REPLACEMENT OF REJECTED TREES WILL BE DONE AT THE CONTRACTOR'S EXPENSE NOT BY THE VILLAGE OF ASHVILLE.
- 5. LOCATIONS OF TREES TO MEET **THE REQUIREMENTS OF DESIGN STANDARDS 3.5-2.** ≥15 FT FROM DRIVEWAYS, ≥ 10 FT FROM DRAINAGE INLETS,≥ 20 FT FROM DRYWELLS, NOT OBSTRUCT TRAFFIC SIGNS OR SIGHT TRIANGLES, AND 15 FT FROM UNDERGROUND UTILITIES
- 6. AFTER PLANTING, IF TREES ARE UNSTABLE, STAKING MAY BE USED BUT ONLY AS NECESSARY. AT 6 MONTHS, ALL STAKING MATERIAL SHALL BE REMOVED. IF TREE IS STILL UNSTABLE, AFTER 6 MONTHS, TREE MAY NEED TO BE REPLACED.

APPROVED BY	ADOPTED: REVISED: SUPERSEDES:	EVISED: 10/2020 UPERSEDES: NEW CHECKED BY: WFC FORESTRY SE	TREE PLANTING DETAILS ALL TYPES, FORMS AND SPECIES	
	CHECKED BY: REVISED BY:		HURESTRY SERVICES ISSUE	NDARD AN No.

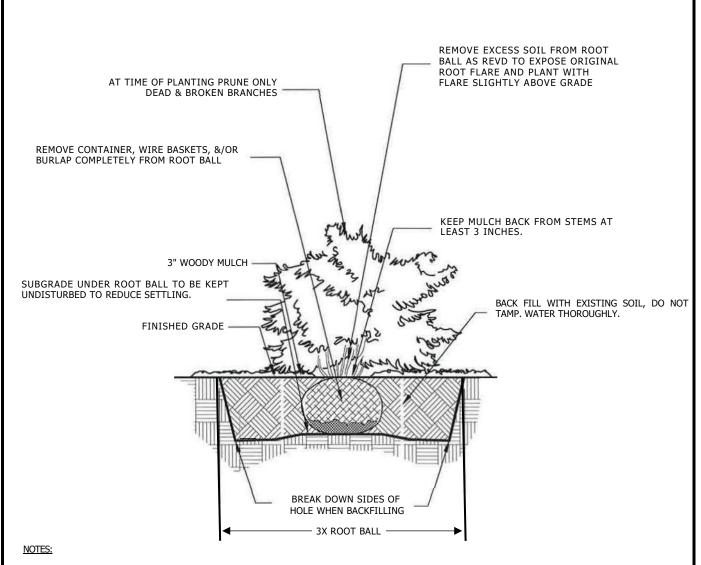

- SHRUBS BURIED TOO DEEP, OR WITHOUT EXPOSING ROOT FLARE WILL BE REJECTED & SHALL BE REMOVED & REPLANTED AT PROPER DEPTH.
- 2. DEVIATIONS FROM THIS DETAIL SHALL ONLY BE ALLOWED WITH PERMISSION FROM THE VILLAGE ARBORIST OR TREE ADVISORY BOARD.
- 3. SHRUBS NOT PLANTED IN CONFORMITY WITH THIS DETAIL WILL BE REJECTED BY THE VILLAGE ARBORIST OR TREE ADISORY BOARD. REPLACEMENT OF REJECTED SHRUBS WILL BE DONE AT THE CONTRACTOR'S EXPENSE & NOT BY THE VILLAG OF ASHVILLE.

ARPROVED BY	ADOPTED: 10/2020 REVISED: 10/2020 SUPERSEDES: NEW	SHRUB PLANTING DETAILS ALL TYPES, FORMS AND SPECIES
	CHECKED BY: WFC SCALE: REVISED BY:	FORESTRY SERVICES VILLAGE OF ASHVILLE, OHIO STANDARD PLAN No.